

**GCA516 GSM CAMERA (MMS SENDER)**

WIRELESS ALARM SYSTEM

GCA516 is a compact, wireless security system for residential and business installations. Its build-in triple bands GSM communicator brings innovative feature-rich monitoring solution best-fitted to every user's lifestyle.

**FEATURES**


comprises of following functional activities

▼ **Wireless Triple-Band GSM Communication**



Transfer photo, audio & message to cellphone and e-mail box through GSM / GPRS networkss  
No transmission cable to connect

▼ **Build-in Infrared Camera**



3 megapixel cmos sensor (640x480 pixel)  
Night vision and move detection  
Both top and side view are 90 degree

▼ **Build-in Pet Immune Passive Sensor**

Detect human body passively in 5 meters, night view 2 meters  
Both top and side view are 90 degree  
Monitoring enry and exit of designated zone

▼ **Build-in Speaker (microphone) and Backup Battery**

Site monitoring live audio infallibly Working continually

▼ **Comfortable and Easy to Work With**

Configure and operate through mobile phone or remote control  
Industrial & mechanical design and integrative construction

▼ **Abundant alarm solutions**

Call five telephone / mobile phone numbers automatically  
SMS message reporting to mobile phone  
MMS photo reporting to mobile phone & email box  
Contact to GSM plateform or alarm center  
Provide live photo or listen on-site voice at any time

▼ **Support External Peripherals**

Could setup eight sets wireless detectors or sensors  
Such as door contact, glass break detector, passive infrared sensor  
smoke sensor and more remote controls



**APPLICATIONS**

HOME, HOUSE  
FARM, VILLA

GARAGE, QUARTERS

OFFICE, FINANCE ROOM  
WAREHOUSE, WORKSHOP

SHOP, STORE  
SCHOOL, LIBRARY  
HOTEL, RESTAURANT

BANK, POSTOFFICE  
HOSPITAL, PRISON

GOVERNMENT MINISTRY  
BEADHOUSE



**GCA516 GSM CAMERA (MMS SENDER)**

WIRELESS ALARM SYSTEM

**SPECIFICATIONS**

(characteristic)


- Frequencies - GSM,GPRS 900/1800/1900 MHz
- Voltage - AC85V~240V / DC12V
- Back-up Battery - 1,000 mAh
- Current - Stand-by in Daylight <50mA  
Stand-by in Night 200mA  
Alarm Condition <2,500mA
- Remote Control Frequency - 315/433 MHz
- Remote Control Distance - 3~5 Meters (10~16 Feet)
- Working Temperature - -30~+50 C (-86~+122 F)
- Working Humidity - 10%~90%
- Dimension - 140x95x37mm (55x37.5x14.5in)
- Camera Weight - 600gm (1.60 lb)
- Camera Case Material - Aluminium (Black Color)



**ACCESSORIES**

WHAT WILL YOU GET FOR A FULL SET

- 1pc GSM Camera Machine
- 1pc short GSM antenna
- 1pc long GSM antenna
- 1pc mounting stand
- 1pc power adaptor
- 1pc remote control

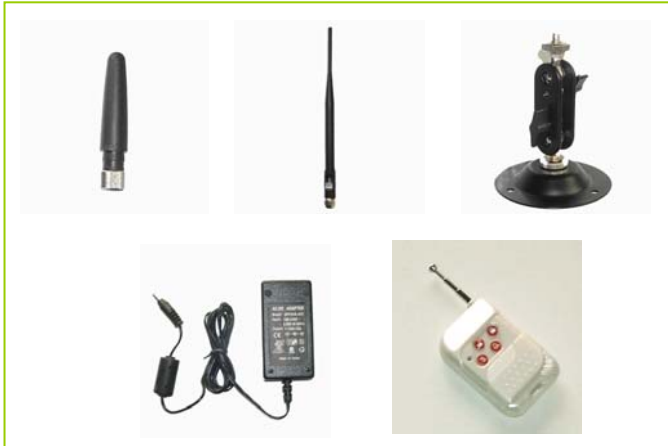

**PACKAGING**

1 full set per brown inner box with polyfoam partation

**PRICES**

Quantity	Price	Lead Time
1 set	enquire us	3 days
10 sets	enquire us	3 days
20 sets	enquire us	5 days
50 sets	enquire us	10 days
100 sets	enquire us	15 days

**MAKE AN ENQUIRY**

TAYX LTD (United Kingdom)  
tayx@tayx.co.uk

Hongtongda Electron Ltd (Shenzhen)  
sales@szelectron.com